

55 Inch 0.88mm Seam Highlight LCD Splicing Display Unit

MW5255-HS6-D



Features

- Industrial-grade panel, highly reliable integrated design.
- Built-in image splicing display feature.
- Supports special splicing compensation.
- Supports anti-burn-in and image flip.
- Supports white balance adjustment.
- Supports IR control and RS232 loop control.
- Supports recording and showing working time on panel.
- Allows to quickly set the splicing unit ID, convenient for on-site commissioning.
- Supports double frame function.
- Supports delayed boot after power on.

1




- Custom buttons on the board can be set to test image or aging problems.
- Two HDMI input interfaces and one HDMI loop output interface, supports video signal loop out display.


Specifications

| Panel | Description |
|--------------------------------|--|
| Panel size | 55 inch |
| Pixel Pitch (H*V) (mm) | 0.63*0.63 |
| Resolution | 1920*1080 |
| Physical seam (mm) | 0.88 |
| Colors | 16.7M |
| Brightness (cd/m²) | 700 |
| Contrast ratio | 4000:1 |
| Response time (ms) | 8 |
| Refresh rate | 60Hz |
| Viewing angle (H/V) | 178°/178° |
| Interface | Description |
| Video input | HDMI*2, DVI*1, VGA*1, |
| Video output | HDMI*1 |
| Other interfaces | USB*1, RS232*2 (RJ45 connector), 3.5mm IR interface*1, power on/off button*1 |
| Power loop output | Support |
| General | Description |
| Input voltage | AC 100V to 240V, 50/60Hz |
| Overall power consumption (W) | 232 |
| Product dimensions (W×H×D)(mm) | 1211.70*682.55*122.54 |
| Weight (kg) | Single display net weight: 29.56 |
| Operating temperature | 0°C to 40°C |
| Operating humidity | 20% to 90% (noncondensing) |
| Storage temperature | -20°C to 60°C |
| Storage humidity | 10% to 90% (noncondensing) |
| Lifetime (h) | 50000 |




Dimensions

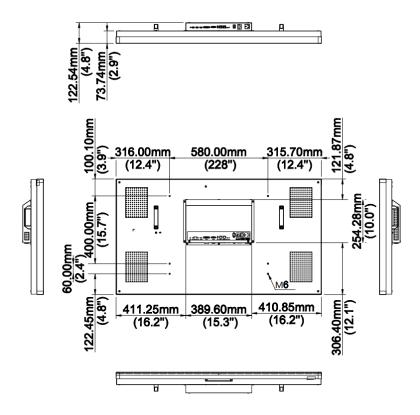

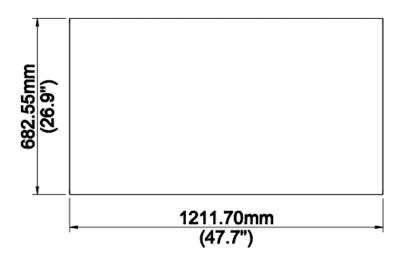



Interfaces

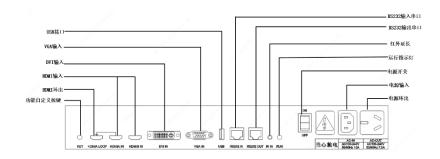

Ordering Information

| Model | Description |
|--------------|---|
| MW5255-HS6-D | 55 Inch 0.88mm Seam Highlight LCD Splicing Display Unit |

Zhejiang Uniview Technologies Co., Ltd.

Xietong Street No. 369, Binjiang District, Hangzhou, China (310051)

Email: overseas business@uniview.com; global support@uniview.com

http://www.uniview.com

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.