

LED IPS Monitor

MW- LC22IS



Key Features

- Resolution is up to at 1920×1080.
- Refresh rate up to 100Hz.
- 178° horizontal and vertical viewing angle.
- Screen can reduce blue light, protect eyes.
- Plastic body, ultra narrow bezel, light weight and elegant.
- Shielding cover design, effectively preventing electromagnetic radiation.
- Stable structure design, highly durable.
- Automatically detect if the signal is connected successful.
- Support multiply language.

Specifications


Model	MW-LC22
Display	
Display Type	LED Backlight
Screen Size	21.45"
Pixel Pitch(mm)	0.24*0.24
Max Resolution	1920*1080

Brightness(cd/m ²)	250
Contrast	1000:1
Response Time(ms)	5
color	16.7M
Refresh rate	100HZ
Viewing Angle	Horizontal 178°, Vertical 178°
Interface	
Input	1* HDMI、1*VGA
Speaker	
Speaker	2*1W
OSD	
Multi- Language	16 (English, French, Spanish, Portuguese, German, Italian, Dutch, Swedish, Finnish, Polish, Czech, Russian, Korean, Chinese Simplified, Chinese Traditional, Japanese)
Mounting	
VESA(mm)	100*100
Wall-mounted Thread	4-M4 Threaded hole
General	
Power supply	DC 12V, 2A
Consumption(W)	≤24 (on) ≤0.5(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~ 50°C
Storage Humidity	10%~90% (No Condensation)
Dimension (W*H*D)(mm)	493.06*382.69*199.83 (With Pedestal)
Package(W*H*D)(mm)	557*370*140
Weight(Kg)	Net Weight:2.3 Gross Weight:3.3
Accessory	
Standard	HDMI cable、Adapter、Pedestal、Quick Guide

Appearance

Dimensions

MW- LC22IS:

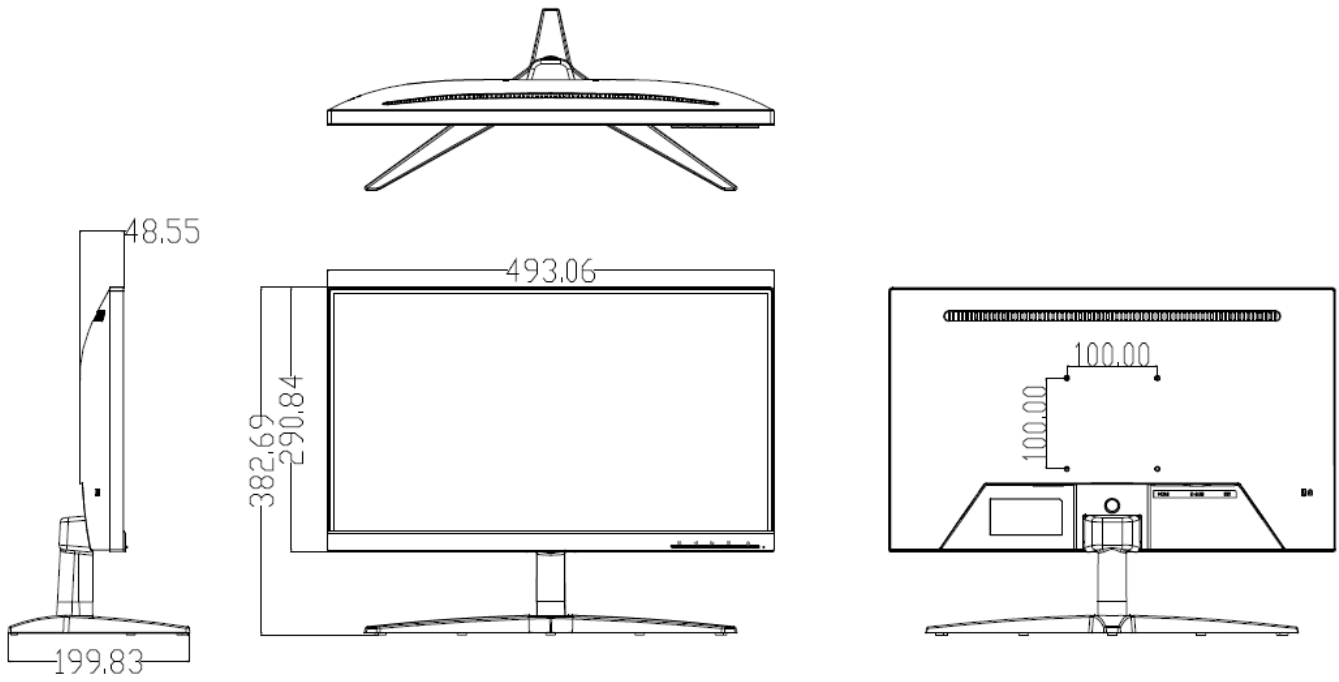

Zhejiang Uniview Technologies Co., Ltd.

Xietong Street No. 369, Binjiang District, Hangzhou, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.