

Digital Signage (Wall Mount)

MW3375-G




Specifications

Model	MW3375-G
Panel	
LCD size	75 inches
Light source	LED
Display size (mm)	1649.664 (H) ×927.936 (V)
Resolution	3840 x 2160
Contrast	4000:1
Brightness (cd/m ²)	500
Color support	16.7M
Response time (ms)	8
Frequency	60Hz
Viewing angle (H/V)	178°/178°
Life	Up to 50,000(hrs)
System	
System version	Android 11
CPU frequency	RK3568, 2.0GHz
Memory (RAM)	2GB
Storage (ROM)	32 GB
Support video	MPEG1/MPEG2/MPEG4/AVI/VOB/MOV/WMV/DIVX/RM/RMVB, support super HD 2160P video
Support picture	JPG,JPEG,PNG,BMP
Support TXT	TXT,WORD,EXCEL,PDF
Support Website	HTML,ASP,JSP,PHP
Long-distance control	monitoring the terminal display image in real time

Image rotate	90°,180°,270°image rotate
Software Upgrade	upgrade software by USB disk
Speaker	
Internal speaker	2*10 W
Connectivity	
Wi-Fi	Dual Band 2.4GHz/5GHz
Interface	
interface	USB 2.0 HOST×1、USB 3.0 HOST×1、USB 2.0 OTG×1、TF×1、RS232×1、LAN×1（10/100Mbps）、HDMI OUT×1
Glass	
Glass	4mm tempered glass
Language	
OSD	English、Simplified Chinese
Power	
Voltage	100V to 240V, 50-60 Hz
Maximum power (W)	≤288
Standby power (W)	<0.5
Structure	
Device dimensions (W*H*D) (mm)	1665.2(H)×945.2(V)×80.2(D)
Package dimensions (W*H*D) (mm)	1770(H)×170(D)×1052(V)
VESA	
Wall mount hole (mm)	625.2×400
Environment	
Operating temperature	0 to 40°C
Storage temperature	-20 to 60°C
Storage humidity	10% to 90% RH (non-condensing)
Operating humidity	20% to 85% RH (non-condensing)
System Parameters	
Standard configuration	1*Remote control、1*Power cable、1*Quick guide、1*wall mount bracket、

Appearance

Dimensions

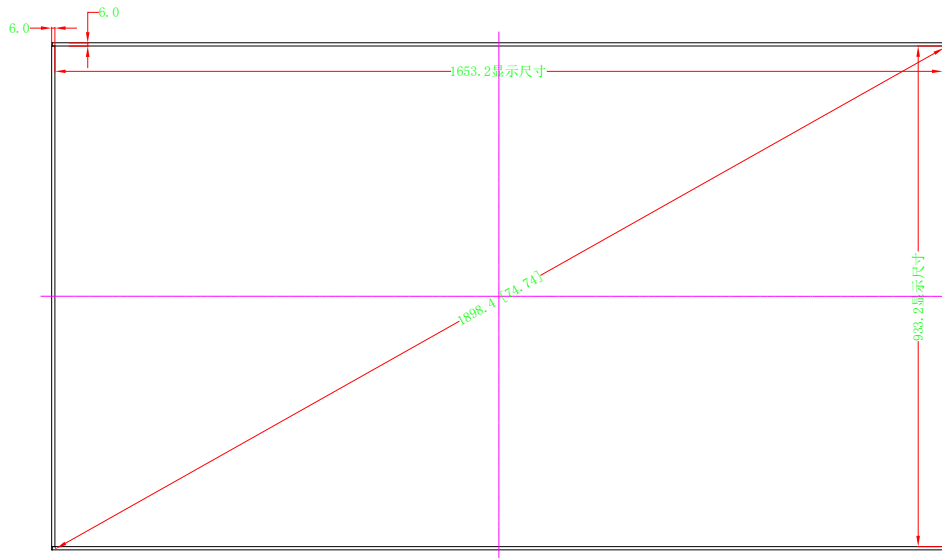

Unit:mm

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice