

Indoor LED Display Module

MW7725-MI-H1C



MW7725-MI-H1C Indoor LED Display Module

Features


- The R, G, B dies are encapsulated together to form a single pixel, delivering excellent color mixing effect and uniformity.
- Integrates lamp board and drive board for even current distribution, low power consumption, and fast heat dissipation.
- High refresh rate driver IC presents delicate and smooth images.
- High brightness and high reliability.
- High contrast with full black lamp.
- Long lifetime.
- Ultra-wide viewing angle ensures satisfactory viewing experience from diversified angles.

Specifications

Model	MW7725-MI-H1C
Module	
LED encapsulation	SMD2121
Pixel pitch (mm)	2.5
Resolution	128*64
Dimensions (W*H*D) (mm)	320*160*14
Pixel density (pitch/m ²)	160000
Evenness (mm)	≤0.2
Weight (kg/pcs)	0.348

Optical	
Brightness (nits)	≥500
Color temperature (K)	2000 to 9300
Viewing angle (H/V)	140°/140°
Center distance deviation of LED	<3%
Brightness uniformity	≥95%
Color uniformity	±0.003Cx,Cy
Contrast ratio	≥8000:1
Processing performance	
Grayscale (bit)	14
Scanning mode (s)	32
Drive mode	Constant current driving
Frame frequency (Hz)	50/60
Refresh rate (Hz)	3840
Electrical	
Power supply (V)	DC 4.5
Average power consumption (W/m ²)	160
Max. power consumption (W/m ²)	550
General	
Unit board signal interface	HUB75
Operating temperature	-10 to 40°C
Operating humidity	10 to 60% RH, non-condensing
Storage temperature	-20 to 60°C
Storage humidity	10 to 65% RH, non-condensing
LED lifetime (H)	≥50000

Dimensions

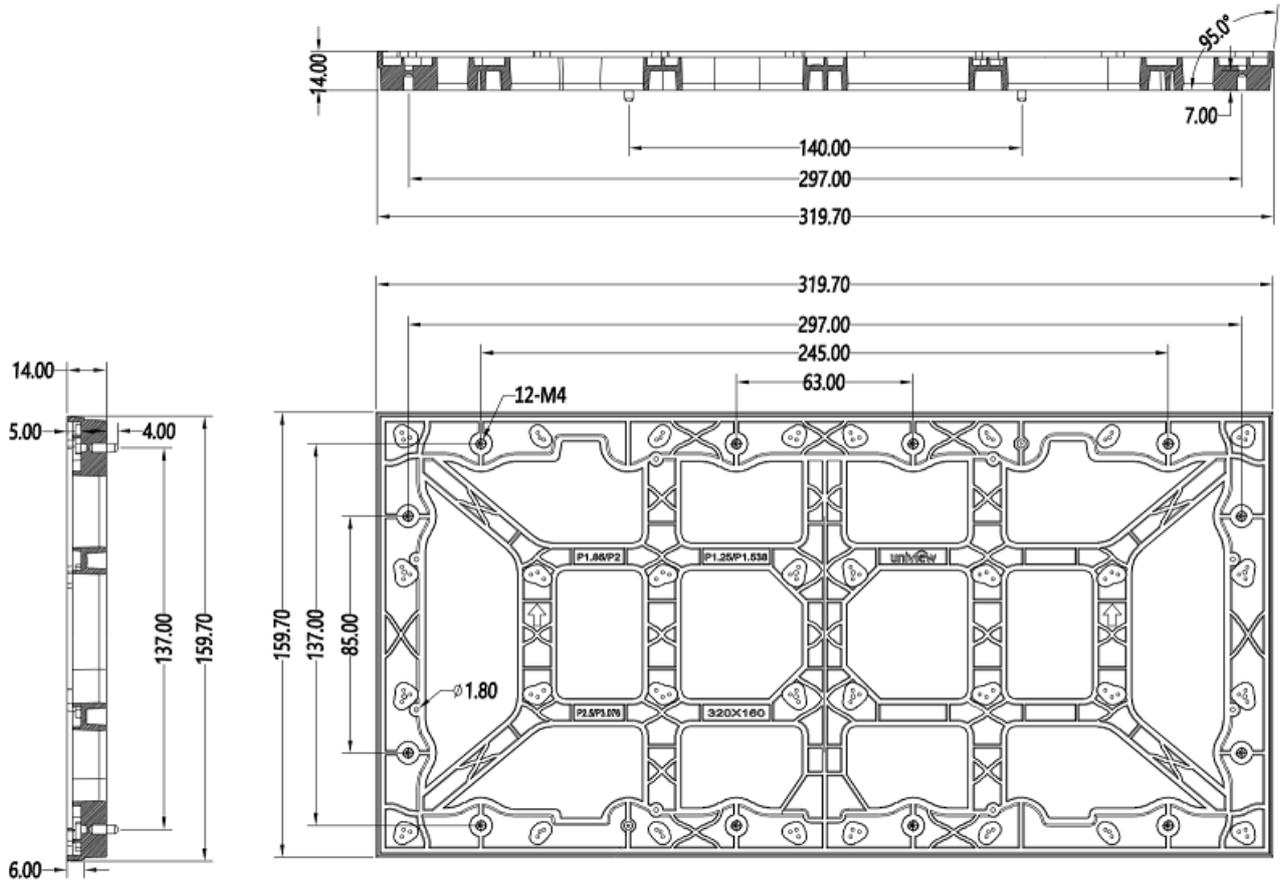

Unit: mm

Ordering Information

Model	Remarks
MW7725-MI-H1C	Indoor LED Display Module

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.