

# 10° Warm Light Strobe Illuminator


LAMP-S16@A10-T30-OS



## Features

- All-in-one structure design presents elegant appearance and makes safe and fast delivery.
- Imported high-power warm light LED die delivers soft light and effectively prevents light pollution.
- Synchronous video illumination.
- Uniform illumination provides clear images without smearing and overexposure.
- Automatic high-frequency strobe illumination triggered by the camera's digital pulse signal.
- Wide voltage range from AC176V to 264V.
- All-weather service.
- IP67, waterproof and dustproof.

## Dimensions

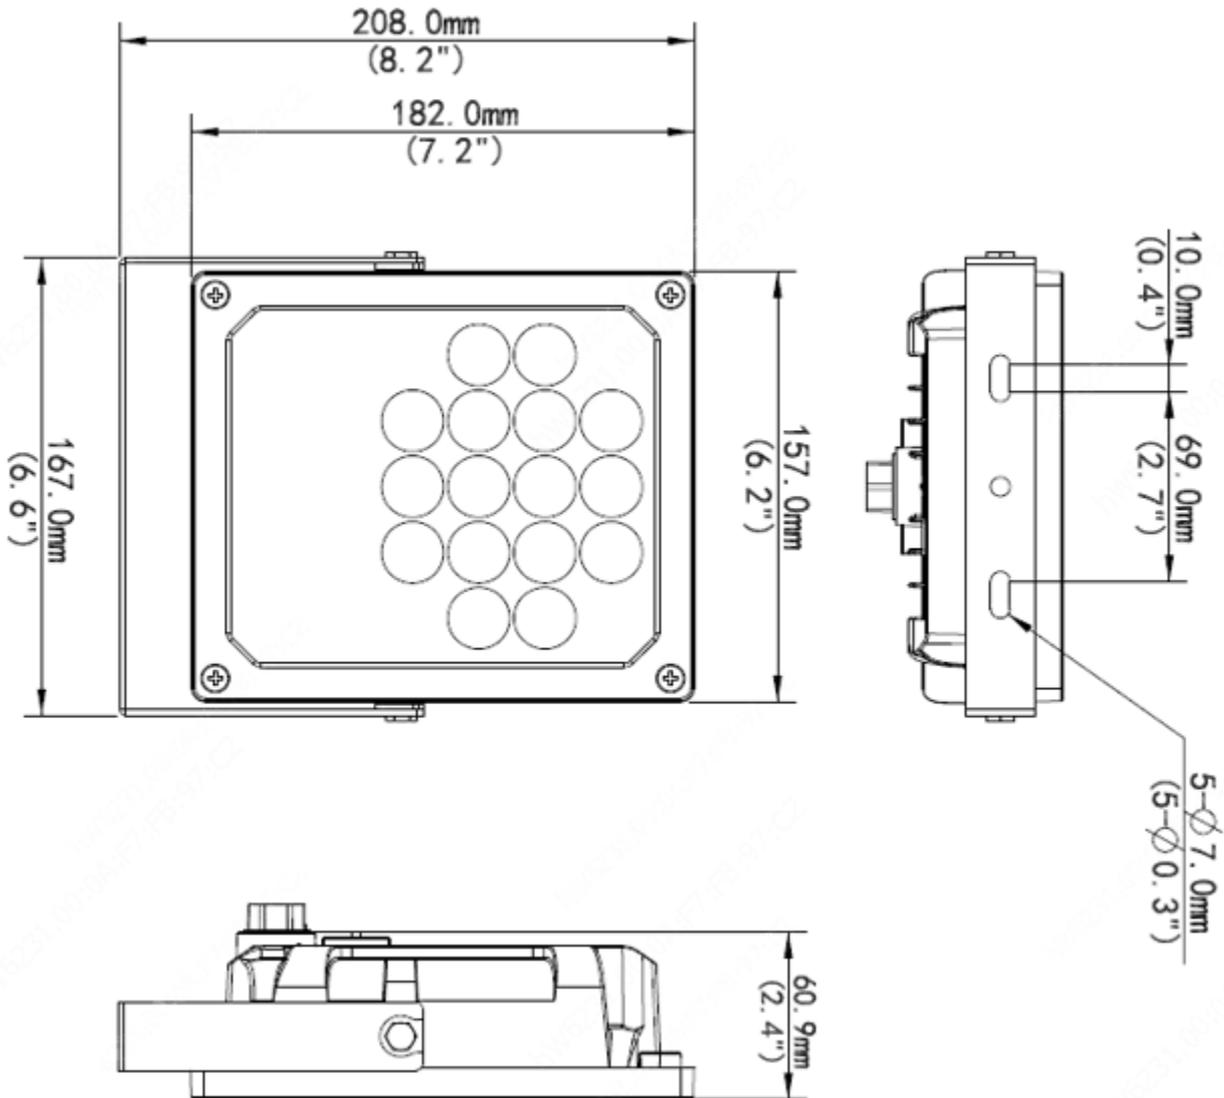

## Accessories

Mount	Remarks	
TR-UP0627	Universal pole mount	Applicable to standard poles: F-pole, T-pole, gantry (pole height not less than 6m)

## Ordering Information

Model	Remarks
LAMP-S16@A10-T30-OS	10° warm light strobe illuminator, without universal bracket

## Specifications

Illuminator	Description
LEDs	16
Light source	Original high-power warm light LED
Color temperature	3000K
Strobe luminous flux	1400lm@20% duty cycle
Illumination angle	10°
Optimal illumination distance	16m to 26m
Trigger mode	TTL level/switch
Trigger level	4V to 6V (active high)
Trigger frequency	40Hz to 200Hz
Trigger duty ratio	1% to 40%
Response time	≤370μs
Bracket rotation angle	-90° to +90°
Interface	1 power input, 1 strobe trigger input
Power supply	AC176V to 264V, 50/60Hz
Power consumption	30W
Weight	1.4kg
Dimensions (LxWxH)	182mm x 157mm x 71.4mm (without universal bracket)
Operating environment	-40°C to +70°C, 10% to 95%RH
Ingress protection	IP67
Lifetime	>50000h@25°C

### Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\* Product specifications and availability are subject to change without notice.