


Smart Interactive Display

MW3598-T-E

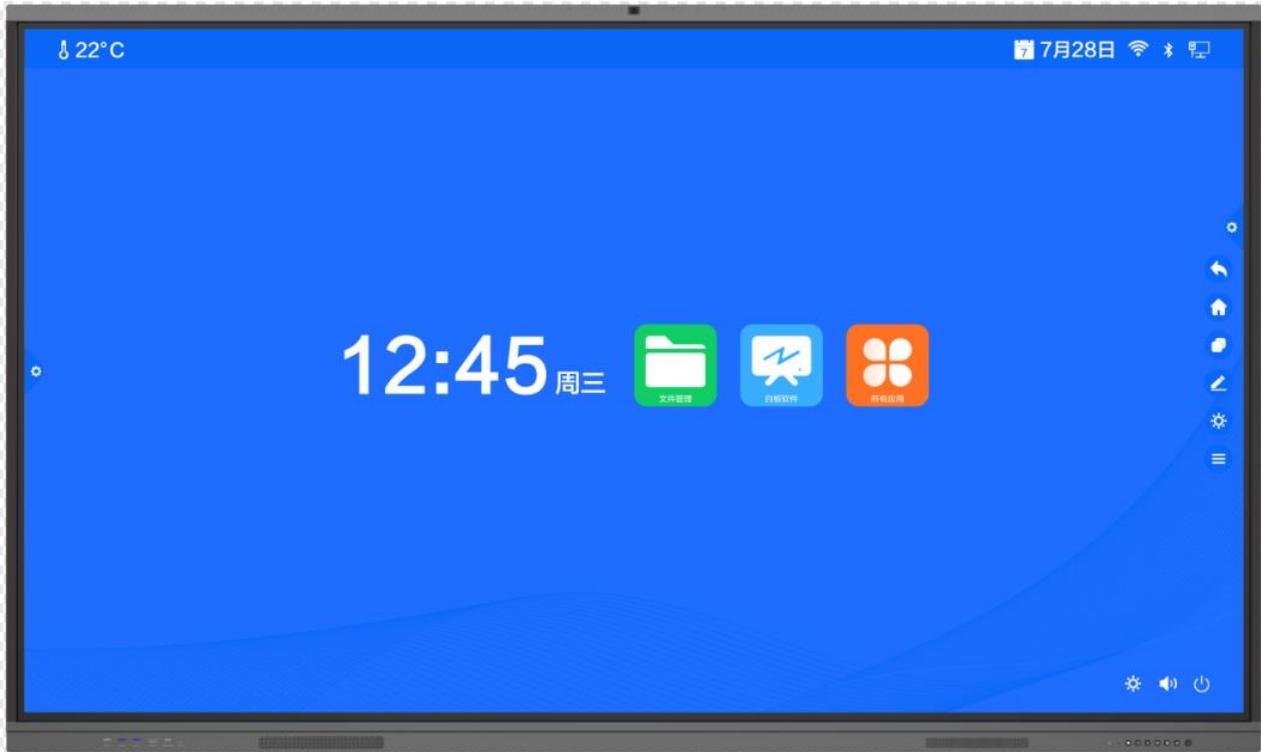

Key Features

- Support computer, tablet, mobile phone through the screen projection software or wireless screen projection
- High-quality stylus, multi-system compatibility, free switching, delicate writing, PPT presentation worse-free
- Support mainstream system equipment one-click screen projection, can support up to four split screen, can achieve large and small screen interaction, different screen display
- 4K UI image display, feel the charm of details, fine and clear handwriting, no jagged feeling
- High precision touch, support twenty point touch, support single point writing, two point zoom, three point drag and free switching
- All applications drag to sort, long press to uninstall the latest taskbar one key clear open, convenient management
- Built-in 2.4G/5G dual-band wireless network, support wireless Internet access and WIFI hotspot


Specifications

Model	MW3598-T-E
Panel	
Backlight	LED
Panel size	98 inches

Resolution	3840*2160
Brightness (cd/m ²)	400
Contrast ratio	1200:1
Response time (ms)	8
Color support	1.07B
Viewing angle (H/V)	178°/178°
Android	
CPU	4-core computer processor
CPU frequency	1.9GHz
RAM/ROM	DDR4: 4GB EMMC: 32GB
Android version	Android 11.0
Touch	
Touch control	Infrared touch screen, 20-point multi-touch at most
Touch precision (mm)	±2
Recognizable object	5 points 2mm
Glass	4mm tempered glass, level 7 on Mohs hardness scale, anti-glare
Response time (ms)	≤10
Touchscreen input	Opaque objects (e.g. finger, pen, etc.)
Camera	13MP
Microphone	Number of arrays: 8 arrays
Interface	
Interface	3*HDMI、1* RJ45、1* USB2.0、3* USB3.0、2*TOUCH USB、1* AV IN、1* RS232、1*earphone、1*TYPE C、1* SPDIF OUT、1* MIC IN、1* TF_card
Audio	
Speaker	2*15W
OSD	
Language supported	Simplified Chinese, Traditional Chinese, Vietnamese, Portuguese, Polish, Korean, Japanese, Italian, Indonesian, French, Spanish, English, German, Thai, Arabic
VESA	
Wall mount hole (mm)	800*600mm
Wall mount screw	4-M8 screw hole, hole depth 20mm
General	
Power supply	AC 100~240V, 50/60Hz
Maximum power consumption (W)	≤600

Standby power consumption (W)	<0.5
Operating temperature	0 to 40°C
Operating humidity	10% to 85% (non-condensing)
Storage temperature	-20 to 60°C
Storage humidity	5% to 90% (non-condensing)
Product dimensions (W*H*D)(mm)	2216*1318.4*97.9mm
Package dimensions (W*H*D)(mm)	2356*1441.5*230mm
Weight (kg)	Net weight:92.0 Gross weight:110.0
Accessories included	1* wall mount, 1* remote control, 2*Touch pen, 1* Quick Start, 1* power cord(3m), 1*USB A-B cable(3m)、1*HDMI cable(3m)、1*Floor Stand

Dimensions

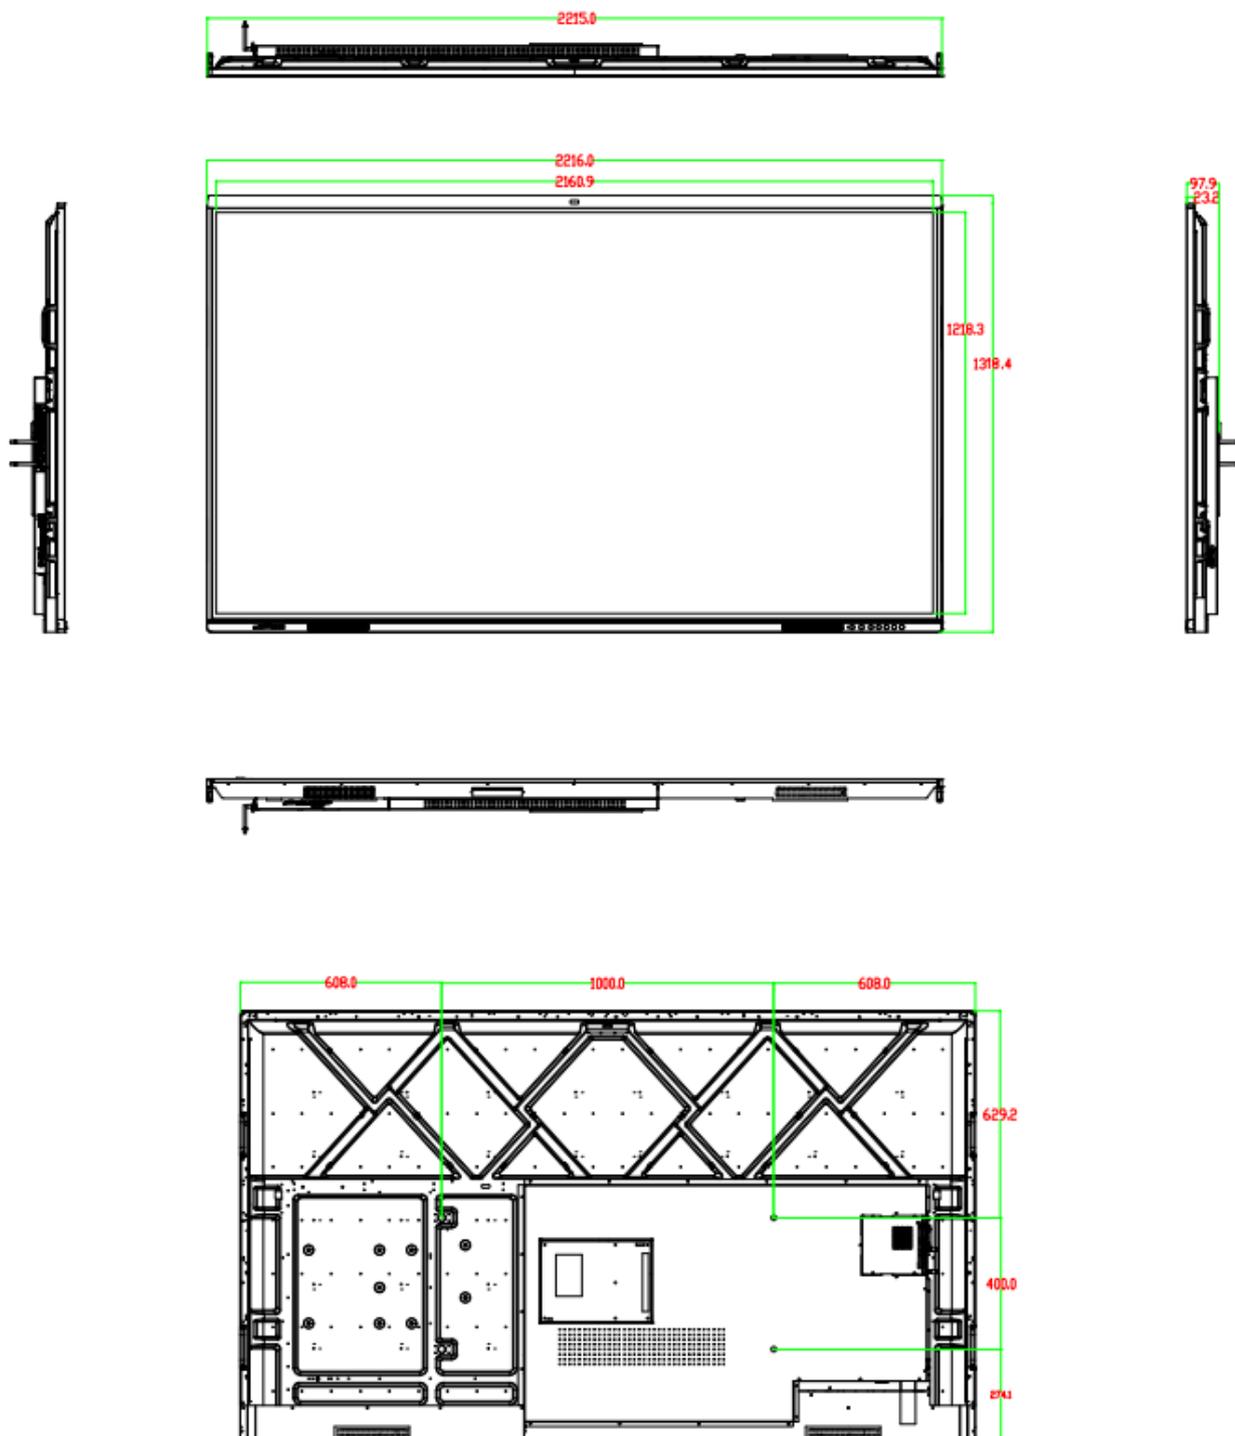

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.